

Solar Flood Light

Product Specification

10-100W

Product Picture:



Features:

- * Die-casting aluminium lamp body
- * No ac power cables, no electricity charges
- * LED lumen 160lm/w
- * IP65 rating


Applications:

- * Plazas, courtyards
- * Factories, warehouses
- * Gardens, parks
- * Sporting venues

Product Parameter:

Model	07105A2-02	07106A2-02	07107A2-02	07108A2-02	07109A2-02
LED Type	10PCS 5730LED	30PCS 5730LED	48PCS 5730LED	90PCS 5730LED	138PCS 5730LED
Battery Type	Lithium-Ion 7.4V 2.5AH	Lithium-Ion 11.1V 2.5AH	Lithium-Ion 11.1V 5AH	Lithium-Ion 11.1V 10AH	Lithium-Ion 11.1V 15.6AH
Solar Panel Type	Polycrystalline 4W 11V	Polycrystalline 6W 15V	Polycrystalline 13.5W 15V	Polycrystalline 24W 15V	Polycrystalline 32W 15V
Color Temperature	3000K-6500K				
LED Lifespan	50000H				
Control Method	Permanent bright				
Operating Temperature	-20°C ~ 60°C				
Storage Temperature	-30°C ~ 70°C				
Gross weight/Carton	15.2kg	22kg	19kg	21kg	13.5kg
Product Size	156*128*40mm	208*176*55mm	232*195*50mm	280*230*61mm	328*280*80mm
Package Size	470*400*225mm 10Pcs/Box	650*430*235mm 10Pcs/Box	435*435*335mm 6Pcs/Box	545*335*405mm 4Pcs/Box	665*190*365mm 2Pcs/Box

Lighting Data:

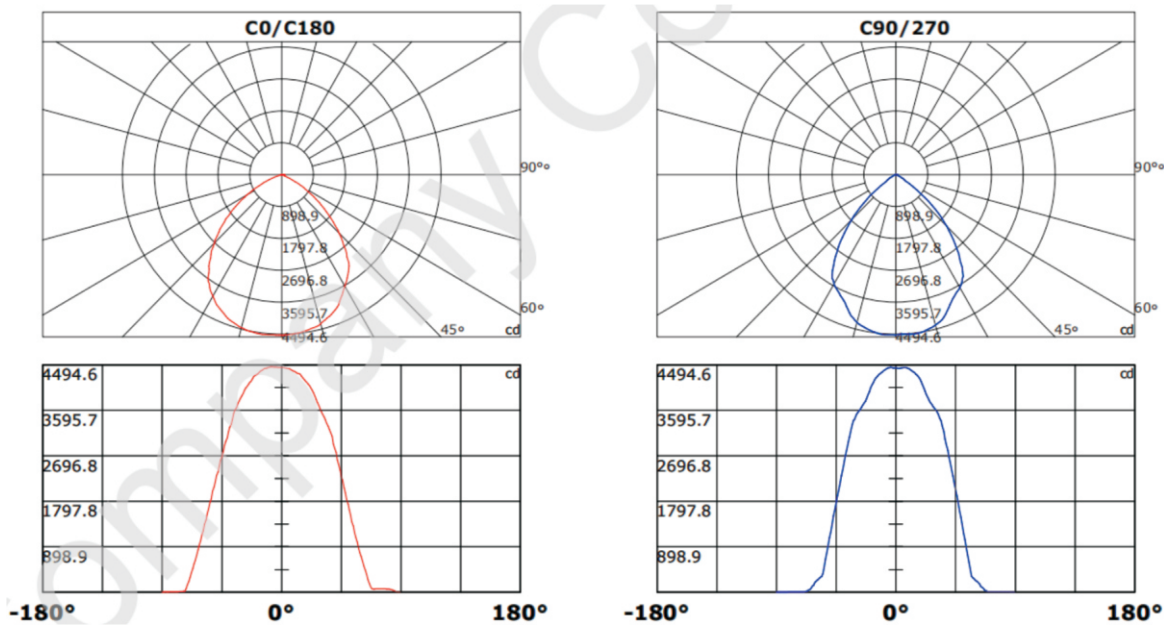

Installation Dimension:

