


- Advantage**
- Permanent magnetic DC Brushless Motors
 - Electrophoresis for motor and pump body
 - NSK bearing
 - Silicon carbide mechanical seal
 - Motor efficiency improved 15%–30%



QB50-DC
QB60-DC



MC4 connector for easy panel connecting

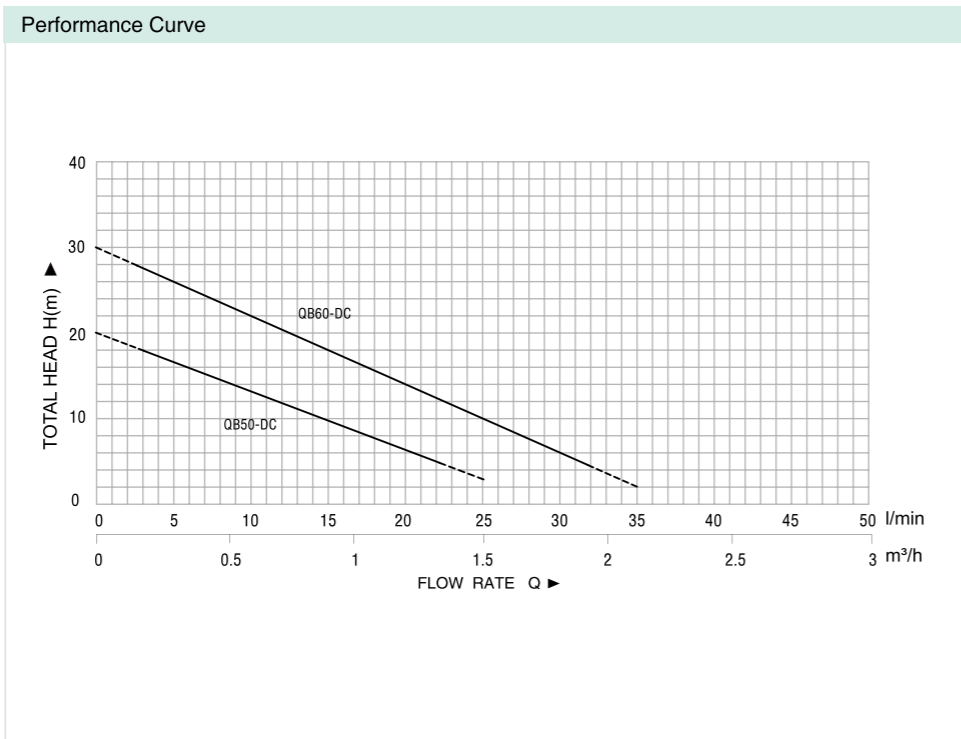


Pump Performance

Model	DC voltage	Power		Inlet/Outlet (In)	Q(m³/h) Q(l/min)	Q(m³/h)							
	V	kW	HP			0	0.3	0.6	0.9	1.2	1.5	1.8	2.1
QB50-DC	12	0.22	0.3	1**1"	H(m)	0	5	10	15	20	25	30	35
QB60-DC	24	0.37	0.5	1**1"		20	17	15	10	5	2		
						30	27	25	18	14	11	5	2

- Advantage**
- Permanent magnetic DC Brushless Motors
 - Electrophoresis for motor and pump body
 - NSK bearing
 - Silicon carbide mechanical seal
 - Motor efficiency improved 15%–30%



MC4 connector for easy panel connecting

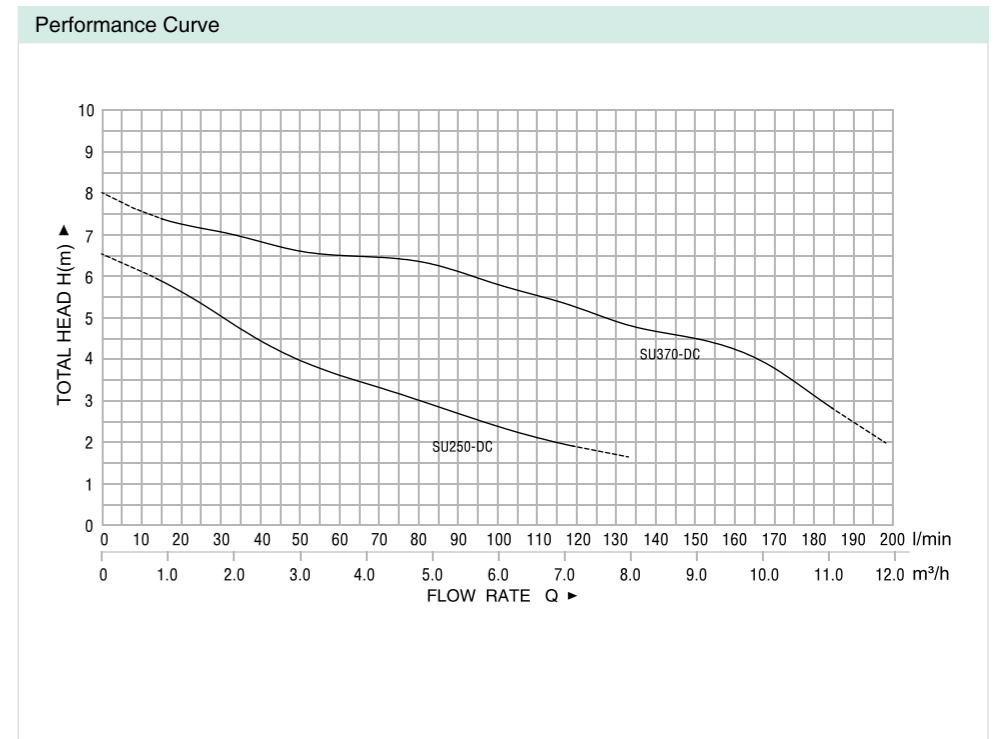

Pump Performance

Model	DC voltage	Power		Inlet/Outlet (In)	Q(m³/h) Q(l/min)	Q(m³/h)												
	V	kW	HP			0	1	2	3	4	5	6	7	8	9	10	11	12
SU250-DC	12	0.25	0.33	1.5"	H(m)	0	17	33	50	67	83	100	117	133	150	167	183	200
SU370-DC	24	0.37	0.5	1.5"		6.5	5.8	5	4	3.5	3	2.5	2.2	1.6				
						7.5	7.3	7	6.8	6.5	6.3	6	5.5	5	4.5	4	3	1.8